



REV	DATE	DESCRIPTION	ECO	SIGN
1	8/15/01	RELEASE TO PILOT	1066	RAB

6 FEET OF ARMORED 0.25 DIA. HOSE.




SPECIFICATIONS:

RATED CAPACITY	4 TONS, (8,000 POUNDS)
RATED OUTPUT, (Typical)	LESS THAN 2 mV/V
COMBINED ERROR	<0.5 %
NON-REPEATABILITY	0.05 %
ZERO BALANCE	± 10 %
TEMPERATURE RANGE, COMPENSATED	50 TO 150° F
TEMPERATURE EFFECT, OUTPUT	0.015 % / ° F
TEMPERATURE EFFECT, ZERO BALANCE	NOT RATED
INPUT / OUTPUT IMPEDANCE	350 OHMS, typical
EXCITATION VOLTAGE (typical)	10 VDC or VAC rms
EXCITATION VOLTAGE, MAXIMUM	15 VDC or VAC rms
INSULATION RESISTANCE	5,000 MEG OHMS @ 50 VDC
MAXIMUM LOAD, SAFE	200 % F.S.
MAXIMUM LOAD, ULTIMATE	400 % F.S.

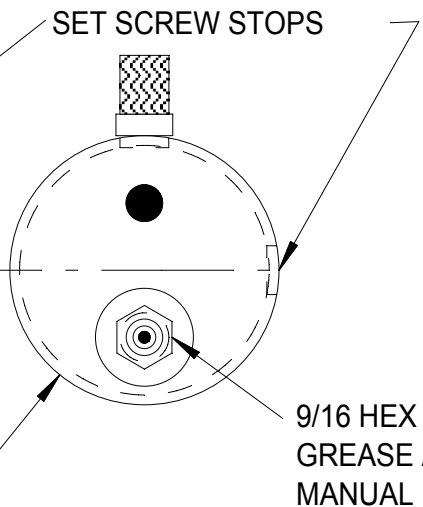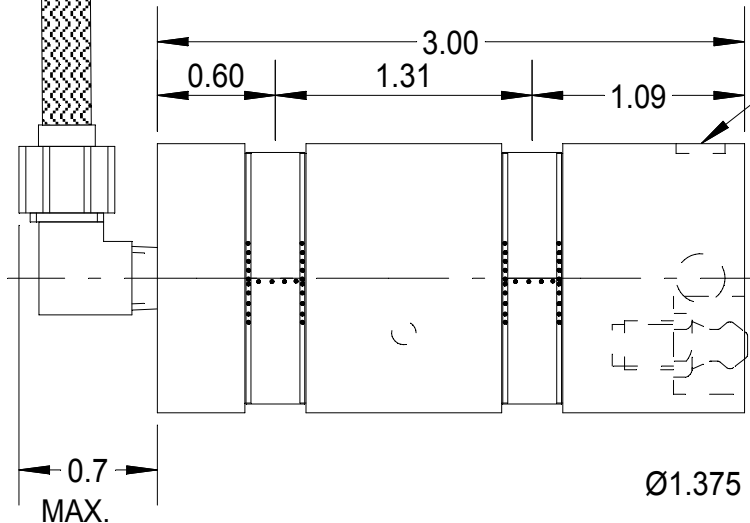

WIRE COLOR CODE:

+EXCITATION	GREEN
+SIGNAL	WHITE
-SIGNAL	RED
-EXCITATION	BLACK
SHIELD	<1 OHM TO GND.

 TOLEDO TRANSDUCERS, INC.	Designed By: Mettert	Date: 6/24/01	Title / Description: SS1362 STOKES 4 TON F4 CLEVIS PIN LOAD CELL SPECIFICATIONS		Part No. SS1362
	Drawn By:	Date:			File Name 11742SP.FCD
	Approved By:	Date:	Dwg. Size: B	Dwg. Type: SPEC	Doc. No. 11742